
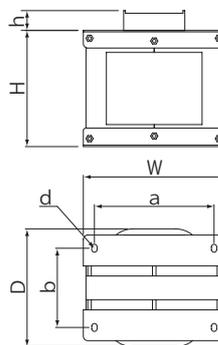


MC & MP

1

MC



- * 容量当たりの重さが最軽量。
- * 正立方体形状。
- * ヒューズの巻込みや端子台の特殊な取付方の指定など、自由に指定可能。

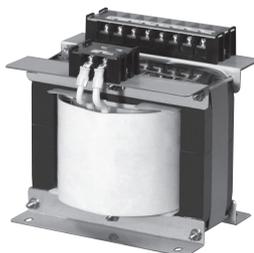

| ビス径 | h(mm) | 電流(参考値) |
|-----|-------|---------|
| M3 | 23 | 20A |
| M4 | 25 | 30A |
| M5 | 40 | 50A |
| M6 | 45 | 90A |
| M8 | 55 | 130A |
| M10 | 65 | 240A |

MP

- * 外形寸法を小型化
- * 電圧変動率小
- * 下表はモデルBの寸法

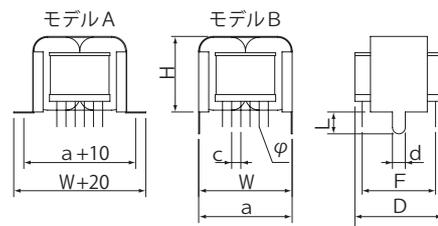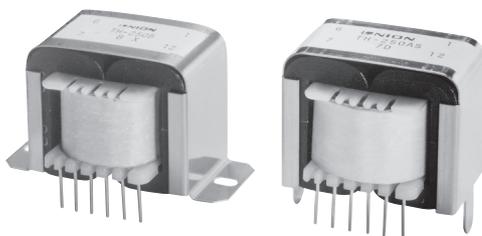

| 型番 | 容量 (VA) | 外形寸法 | | | 取付穴寸法 | | | 重量 kg | | |
|--------|---------|------|-----|-----|-------|-----|------|---------|-----|-----|
| | | W | D | H | a | b | d | | | |
| M C | -3 | 100 | 90 | 75 | 83 | 75 | 60 | 4.5φ | 1.7 | |
| | -4 | 200 | 102 | 100 | 92 | 85 | 74 | 4.5×7 | 3.5 | |
| | -5 | 300 | 112 | 115 | 98 | 98 | 90 | | 6×9 | 4 |
| | -6 | 500 | 140 | 120 | 120 | 125 | 75 | 6.5×10 | | 5 |
| | -7 | 750 | | 135 | | 84 | 7 | | | |
| | -8 | 1K | 162 | 135 | 135 | 90 | 90 | | 9 | |
| | -9 | 1.5K | | | | 105 | 11.5 | | | |
| | -10 | 2K | 188 | 175 | 155 | 152 | 120 | 6.5×10 | 16 | |
| | -11 | 3K | | 210 | | 150 | 21 | | | |
| | -12 | 4K | 210 | 190 | 200 | 170 | 130 | 8.5×13 | 24 | |
| | -13 | 5K | | 220 | | | 150 | | 29 | |
| | -14 | 7.5K | 265 | 250 | 225 | 220 | 180 | 10.5×15 | 38 | |
| | -15 | 10K | | | | | | | 300 | 280 |
| | -16 | 15K | 350 | 300 | 270 | 300 | 200 | 12.5φ | | |
| | -17 | 20K | | | | | | | 375 | 320 |
| | -17.5 | 25K | 430 | 340 | 330 | 320 | 200 | | | |
| | -18 | 30K | | | | | | 430 | 380 | 330 |
| | -18.5 | 40K | 500 | 400 | 450 | 360 | 240 | | | |
| | -19 | 50K | | | | | | 540 | 450 | 450 |
| | -20 | 75K | 540 | 450 | 450 | 400 | 240 | | | |
| | -21 | 100K | | | | | | 540 | 450 | 450 |

| 型番 | 容量 (VA) | 外形寸法 | | | 取付穴寸法 | | | 端子開ピッチ | | 端子 (ピン) | | 変動率 (%) | 重量 g | |
|--------|---------|------|----|----|-------|-------|----|--------|----|---------|-----|---------|------|-----|
| | | W | D | H | a | t×d | L | C | F | φ | 本数 | | | |
| M P | -40-03 | 2.5 | 32 | 35 | 42 | 0.5×4 | 10 | 5 | 25 | 0.8 | 6×2 | 6×2 | 25 | 150 |
| | -02 | 5 | 41 | | | | | | | | | | 20 | 200 |
| | -01 | 7.5 | 51 | | | | | | | | | | 18 | 290 |
| | -1 | 10 | 61 | | | | | | | | | | 16 | 370 |
| | -2 | 15 | 71 | | | | | | | | | | 14 | 460 |
| | -50-1 | 10 | 37 | | | | | | | | | | 42 | 52 |
| | -2 | 15 | 42 | 14 | 300 | | | | | | | | | |
| | -3 | 20 | 52 | 12 | 420 | | | | | | | | | |
| | -4 | 30 | 62 | 11 | 550 | | | | | | | | | |
| | -5 | 40 | 72 | 10 | 660 | | | | | | | | | |
| | -60-2 | 15 | 46 | 46 | 62 | 0.5×7 | 15 | 7.5 | 35 | 1 | 6×2 | 6×2 | | |
| | -3 | 20 | 50 | | | | | | | | | | 11 | 470 |
| | -4 | 30 | 60 | | | | | | | | | | 10 | 630 |
| | -5 | 40 | 70 | | | | | | | | | | 9 | 750 |
| | -6 | 50 | 75 | | | | | | | | | | 8 | 850 |
| | -7 | 60 | 80 | | | | | | | | | | 7.5 | 950 |
| | -8 | 70 | 90 | 7 | 1150 | | | | | | | | | |

電源トランス

三相トランス

ケース入トランス

エッジワイズコイル

高周波トランス

高圧・高耐圧トランス

特注トランス